




HTT GEN-2 LITE

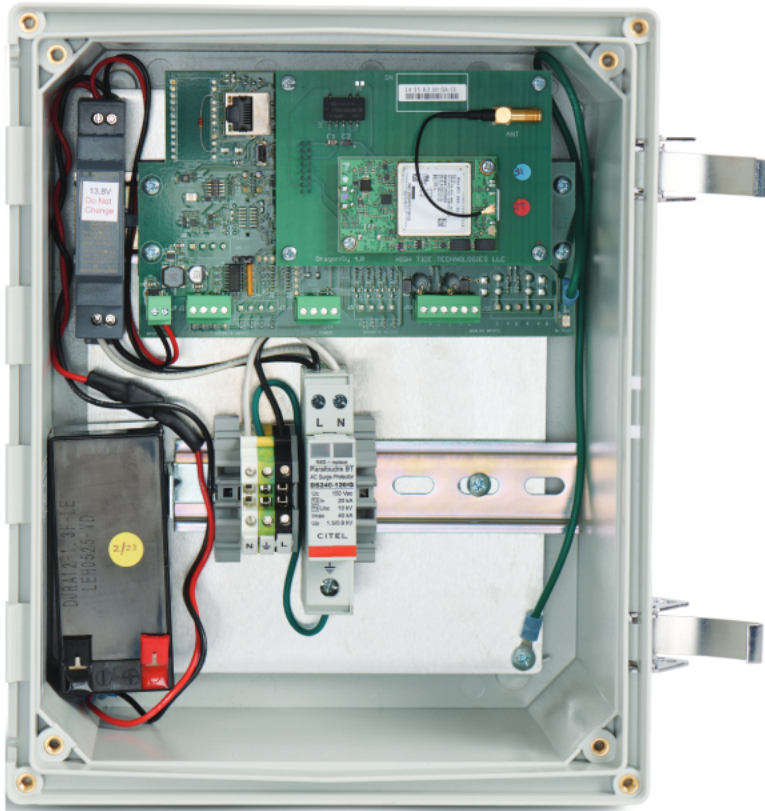

The GEN-2 Lite is a small but mighty RTU that facilitates essential monitoring insights and delivers alarm notifications when things go wrong. While the capabilities of its predecessor were impressive, this next-generation unit raises the bar even higher with faster data reporting and over-the-air firmware updates.

The GEN-2 Lite enables essential configurations that streamline efficiency and mitigate problems. The unit is backward compatible to High Tide's legacy RTU series, so there's no need to upgrade until you're ready.

The unit is easy to install and doesn't require any user programming. Typical applications include: wastewater lift stations and manhole monitoring.

SPECIFICATIONS

- I/O: 4 digital inputs; 2 analog inputs; not powered
- Communications methods: cellular, Ethernet, or dual (cell + Ethernet)
- Enclosure: 8in x 10in, NEMA 4X polycarbonate or backplate kit
- Operating temperature: -25C to 70C
- Input power: 100-240V / 50-60Hz
- Backup battery: 12V 1-2 days

FEATURES & BENEFITS

- Easy installation, maintenance & updates
- No user programming required
- UL certified
- Data poll readings every 5 minutes
- Event & pump status monitoring & alarm notifications
- Supports pulse inputs for rain gauge or flow meter
- Flow estimation features included
- Firmware updates can be made remotely
- 24/7/365 factory support